

# CONTRACTORS NOTICE


## REQUIREMENTS FOR ROCK ENTRANCE TO CONSTRUCTION SITE\*

\*MUST BE COMPLETE AT TIME OF FOUNDATION INSPECTION

### CONTRACTORS SHALL INSTALL SILT FENCE TO EDGE OF ROCK DRIVEWAY


#### MAINTENANCE

THE ROCK PAD NEEDS OCCASIONAL MAINTENANCE TO PREVENT TRACKING OF MUD ONTO ROADWAYS THAT ADJOIN THE PROJECT. THIS WILL REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL ROCK OR REMOVAL AND REINSTALLATION OF THE PAD.

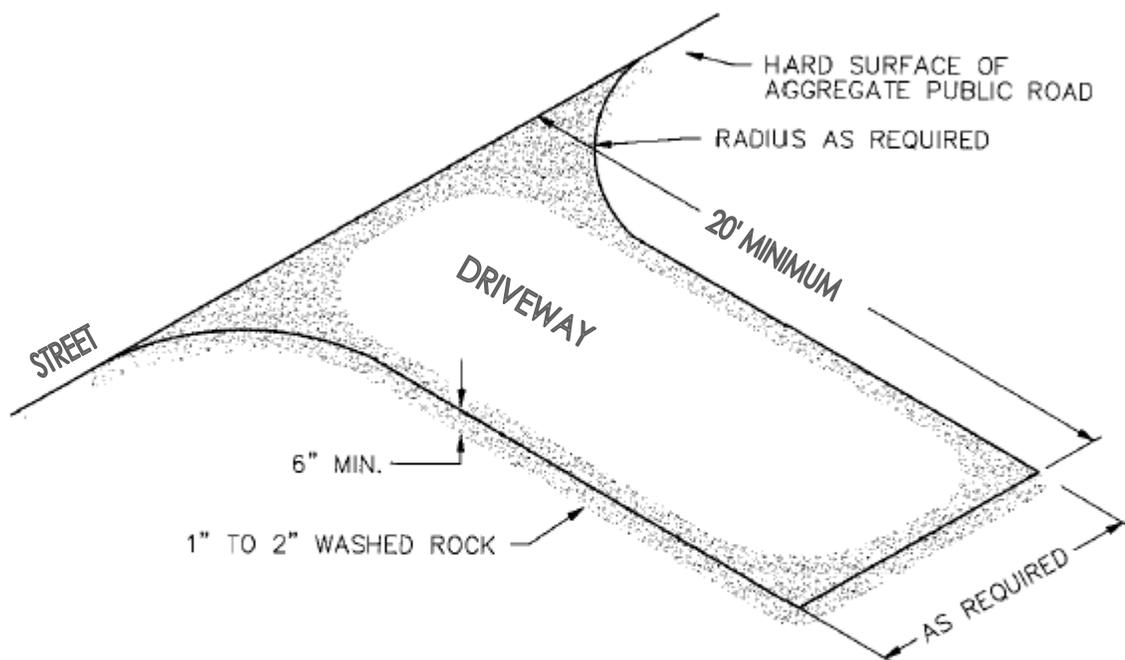

#### NOTE:

1. ROCK SIZE SHOULD BE 1" TO 2" IN SIZE SUCH AS MNDOT CA-1 OR CA-2 COURSE AGGREGATE.
2. A GEOTEXTILE FABRIC SHALL BE USED UNDER THE ROCK TO PREVENT MIGRATION OF THE UNDERLYING SOIL INTO THE STONE.
3. REMOVE MUD AND DEBRIS FROM TIRES AND VEHICLE UNDERCARRIAGE PRIOR TO LEAVING THE SITE.



CITY OF ZIMMERMAN



ROCK ENTRANCE TO  
CONSTRUCTION SITE

PLATE NO.

GC-1

DATE:

FEB. 2005